DENVER
THE MILE HIGH CITY

On-Call Professional Services
Task Order

Project Name: W Alameda Lane Reduction

Project Manager: Abi Subramanian

Task Order #: 2 DOTI-202264596

Alfresco/Jaggaer # / Workday PO: / **PO-00120141**

Workday Project ID(s): PRJ-10004551

Master Contract Alfresco/Jaggaer #: 202056606

Consultant/Supplier: Kimley Horn

Supplier #: SC-00005573

Supplier ID: DENVR0000006764

% Complete Invoicing Allowed: No

Upon this task order being signed by the approving parties, the following described task order shall be executed by the Consultant/Vendor without changing the terms of the Master On-Call Contract. The Consultant/Vendor agrees to furnish all materials and labor and perform all work required to complete the task order, as described below and within the attached signed proposal, in accordance with the requirements for similar work covered by the Contract:

An initial traffic study was conducted in the spring of 2018 along the Alameda in West Washington Park. Restricting a left turn movement on Corona St was implemented to mitigate safety concerns. After improvements were made, additional traffic analysis was performed along Alameda. It was determined that a lane reduction may be possible along Alameda Ave between Lincoln Street and Franklin Street. This scope of work includes the evaluation and identification of lane reduction limits, verification of traffic operations and safety of the proposed condition, and conceptual design of lane reduction. This mini-bid procurement included final design services based on the findings from the conceptual design. Final design services will be scoped at a later date.

KIMLEY HORN

TASK ORDER 2 SUMMARY

This Task Order (Do Not Exceed): **$66,156.60**
Task Order Duration: **365** Calendar Days from NTP
Scope Includes M/W/S/D/EBE Participation: Yes (M/WBE)

MASTER ON-CALL CATEGORYSUMMARY

TASK ORDER TYPE: Type Two
TASK ORDER CATEGORY (if applicable): 4-Multimodal Design

On-Call Contract Expiration Date: January 14, 2024
M/W/S/D/EBE On-Call Participation Commitment: 25%

Total of All Task Orders Issued:	$190,000.00
Total Task Additions/Deductions (all changes):	$0.00
This Task Order:	$66,156.60
Total of All Task Orders & Changes Issued:	**$256,156.60**
Maximum On-Call Category Capacity:	$2,750,000.00
Remaining On-Call Category Capacity:	**$2,493,843.40**

(for category-based contracts)

Maximum On-Call Contract Capacity:	**$2,750,000.00**
Remaining On-Call Contract Capacity:	**$2,493,843.00**

Approval in Jaggaer

Approved by Executive Director **Date**

Matt MacLachlan 8/15/2022
Approved by Division Director **Date**

NA

Approved by Using Agency(s) – If Applicable **Date**

Matt MacLachlan 8/15/2022
Approved by Group Manager **Date**

Abi Subramanian 8/15/2022
Approved by Project Manager **Date**

Kristen Moore 8/15/2022
Approved by On-Call Manager **Date**

NOTE: No person shall authorize or perform any of the above work until the task order has all signatures and an NTP has been issued.

Distribution: dsbo@denvergov.org, kristen.moore@denvergov.org, abi.subramanian@denvergov.org

Form 44 (Contract Request form)

Department of Transportation and Infrastructure

Contract Administration
201 W. Colfax Avenue, Dept. 614
Denver, CO 80202

doti.contracts@denvergov.org

Please review instruction tabs prior to completing this Form 44.

DENVER THE MILE HIGH CITY

PLEASE ATTACH ALL RELATED DOCUMENTS TO EMAIL WHEN SENDING FORM 44

Requestor (Project Manager)	Workday Project Name		Project Manager Telephone #	Type of Request	Date
Abi Subramanian	W Alameda Lane Reduction		7209131736	Professional Services)	7/12/2022
Supplier/Grantor Name and Address	**Supplier ID**	**Workday Supplier Contract No. (SC #)**	**Master On-Call Alfresco No.**	**Work Order/ Task Order No.**	**Alfresco Contract # (Amendment Only)**
Kimley Horn	DENVR0000006764	SC-00005573	202056606	2	

Basic Scope: Must provide detailed scope separately for use as Exhibit; Must provide specific location of work (geographical or specific facility)

An initial traffic study was conducted in the spring of 2018 along the Alameda in West Washington Park. Restricting a left turn movement on Corona St was implemented to mitigate safety concerns. After improvements were made, additional traffic analysis was performed along Alameda. It was determined that a lane reduction may be possible along Alameda Ave between Lincoln Street and Franklin Street. This scope of work includes the evaluation and identification of lane reduction limits, verification of traffic operations and safety of the proposed condition, and conceptual design of lane reduction. This mini-bid procurement included final design services based on the findings from the conceptual design. Final design services will be scoped at a later date.

Contract Requests:		Amendment Requests:		If Technology Contract	Location Code	Is City Council Approval Required?	City Council District Number
Term From:	**Term To:**	**Term From**	**Term To:**	**S-NOW Ticket Number**			
NTP	NTP + 365 calendar days						7

Funding Information: **Grant Information:**

Fund	Cost Center	Spending Category (General)	Contract Category (If applicable)	WD Capital Program (Parent)	WD PRJ#	WD Award / GR Project ID	$ Amount
31025	C5011000	Safety & Neighborhoods	4 Multimodal Design	PZ039 PC022	PRJ-10004551		$ 66,156.60
				Total Request (if amount is known)			$ 66,156.60

Provided by Contract Administration			Special Instructions:
Requisition Date	Requisition No.	Contract Admin Initials	Salesforce #00562619 Contract Expiration: 01/14/2024 Capacity Check - Completed Type 2 - Selection Memo Included (MC)
	RQ-00086905		
Alfresco Date	Alfresco Contract No.	Workday PO#	**For Contract Administration use only**
	DOTI-202264596		

CCD Project Budget to Actuals Detail

CF TF Project is Inactive: No
CF TF Project is Inactive: No
Project Hierarchy: CCD Projects
Project: PRJ-10004551 West Alameda Lane Reduction
Period to Date: 2022 - Aug
Fund: 31025 Public Works Annual Programs

Agency	Project Hierarchy (Primary)	Project	Fund	Cost Center Hierarchy	Capital Program	Grant	Budget	Commitments	Obligations	Actuals	Remaining Budget	% Remaining	Project Status
	PWT&M - Safety and Neighborhoods	PRJ-10004551 West Alameda Lane Reduction	31025 Public Works Annual Programs	C5011000 Office of the Executive Director Control	PC022 - Safety and Neighborhoods	(Blank)	66,156.60	0	0	0	66,156.60	100%	
		Total					66,156.60	0	0	0	66,156.60	100%	

DENVER
THE MILE HIGH CITY

ON-CALL PROFESSIONAL SERVICES
TASK ORDER SELECTION PROCESS MEMORANDUM

TO: File
FROM: Abi Subramanian
PROJECT: W Alameda Lane Reduction
DATE: 7/13/2022

This memorandum documents the methodology and evaluation criteria used in the selection of an On-Call Professional Services Consultant for the W Alameda Lane Reduction. This memo contains the following information: a brief project description, the On-Call Consultants who received the Proposal Request, the evaluation criteria, and the review results and final recommendation.

Justification for using On-Call Contract:
The reason we utilize the On-Call contracting process is due to the size and overall project budget being within the On-Call guidelines and standards for contracting.

Task Order Selection Process:
To obtain services for the W Alameda Lane Reduction, it was determined by the City's project team to issue Proposal Requests to 4 – Multimodal Design On-Call Consultants. All 4 On-Call Consultants who were issued the request can provide the scope of services requested.

Project Description:
An initial traffic study was conducted in the spring of 2018 along Alameda Avenue in West Washington Park. Restricting a left turn movement on Corona St was implemented to mitigate safety concerns. After improvements were made, additional traffic analysis was performed along Alameda. It was determined that a lane reduction may be possible along Alameda Ave between Lincoln Street and Franklin Street. This scope of work includes the evaluation and identification of lane reduction limits, verification of traffic operations and safety of the proposed condition, and conceptual design of lane reduction. This mini-bid procurement included final design services based on the findings from the conceptual design. Final design services will be scoped at a later date.

Selected Consultants who Received the Proposal Request Opportunity:
The request was issued to Kimley Horn. We received proposals from Kimley Horn & Y2K.

Evaluation Criteria:
Project Approach - 30 points
Schedule - 15 points
Public/Stakeholder Involvement - 15 points
Team Qualifications - 30 points
Proposed Fee - 10 points

Review Team Results and Recommendation:
A Review Team was established to review the submitted proposals and consisted of the following people:

- Abi Subramanian
- Brett Boncore
- Lisa Edington
- Amy Rens
- Ashlee Grace

The Review Team Recommends the Task Order be awarded to: Kimley Horn

Reviewed by: Supervisor B B Group Manager MM

Kimley»Horn

August 12, 2022

Ms. Abi Subramanian, EIT
City and County of Denver
Department of Transportation and Infrastructure
201 W. Colfax Avenue, Denver, CO 80202

RE: ALAMEDA AVENUE LANE REDUCTION

Dear Ms. Subramanian

Kimley-Horn and Associates, Inc. ("Kimley-Horn") is pleased to submit this scope and fee proposal to the City and County of Denver Department of Transportation and Infrastructure (the "City" or "DOTI") for providing civil engineering services to prepare planning and design services for the Alameda Lane Reduction Project ("the Project").

Project Understanding

Kimley-Horn understands that the City and County of Denver desires planning, engineering, and design services for the Alameda Avenue Lane Reduction Project. The purpose of this project is to evaluate the and identify the limits of a lane reduction along Alameda Ave from Lincoln Street to Franklin Street, verify traffic operations and safety of the proposed condition, and conceptual design of lane reduction.

Scope of Services

Kimley-Horn will provide the services specifically set forth below.

TASK 1 PROJECT MANAGEMENT AND MEETINGS

Project Management Plan

Kimley-Horn will create a Project Management Plan (PMP) for the project. The PMP is anticipated to consist of the following:

- Scope of Services;
- Schedule consisting of tasks, meetings, milestones, critical path, delivery dates, workshops, and public meetings tied directly to the scope of work tasks. Updates to the schedule are to be included in the monthly progress reports;
- List of Submittals and associated submittal dates;
- Budget;
- Outside agency coordination;
- Regular monthly progress, submittal, and milestones meetings;
- Monthly project management status report; and
- Quality Assurance/Quality Control (QA/QC) plan with comment and resolution documentation strategy including tracking, response, and resolution spreadsheet examples.

Kimley-Horn will address up to one (1) round of reasonable consolidated comments from DOTI on the Project Management Plan initially and update it throughout the life of the project.

Project Coordination/Meetings

Kimley-Horn will coordinate, prepare for, and attend meetings with DOTI, key stakeholders, and subconsultants as detailed below.

Kickoff Meeting

Kimley-Horn will prepare for, coordinate, and attend up to one (1) Kickoff Meeting. This meeting is anticipated to include the consultant, subconsultants, and DOTI staff.

Coordination Meetings

Kimley-Horn will prepare for, coordinate, and attend up to twelve (12) recurring one-hour bi-weekly check-in virtual meetings with the DOTI Project Manager and staff. The purpose of these meetings will be to review project status and coordinate on action items.

Monthly Invoicing, Budget Monitoring and Reporting

Kimley-Horn's Project Manager will monitor the task order budget regularly and provide DOTI with monthly invoices and a description of work/a progress report.

Project Oversight/Management

The Kimley-Horn project manager will provide weekly oversight and management. It is assumed that up to six (6) hours of effort will be provided for this task.

Deliverables:

- Project Management Plan
- Project Kick-off Meeting
- Meeting Minutes
- Monthly Progress Reports

TASK 2 DATA COLLECTION

Traffic Counts, Travel Time Runs, and Crash Data

Kimley-Horn, through use of a well-qualified subconsultant will collect traffic data along the corridor. Peak hour turning movement counts (AM and PM) will be collected at up to sixteen (16) intersections identified below.

- Alameda Ave & S Lincoln St;
- Alameda Ave & S Sherman St;
- Alameda Ave & S Grant St;
- Alameda Ave & S Logan St;
- Alameda Ave & S Pennsylvania St;
- Alameda Ave & S Pearl St;
- Alameda Ave & S Washington St;
- Alameda Ave & S Clarkson St;
- Alameda Ave & S Emerson St;
- Alameda Ave & S Ogden St;
- Alameda Ave & S Corona St;
- Alameda Ave & S Downing St;
- Alameda Ave & S Marion Pkwy;
- Alameda Ave & S Lafayette St;
- Alameda Ave & S Humboldt St; and
- Alameda Ave & S Franklin St.

Additionally, 24-hour average daily (ADT) traffic counts with vehicle classifications and speeds will be collected at up to three (3) locations along the corridor identified below.

- Alameda Ave between S Lincoln St and S Logan St;
- Alameda Ave between S Logan St and S Downing St; and
- Alameda Ave between S Downing St and S Franklin St.

Kimley-Horn will complete travel time runs along the corridor within the project limits during the AM and PM peak hours.

Kimley-Horn will gather crash reports provided by DOTI.

Existing Conditions Analysis, Site Visit, and Base Map Preparation

Kimley-Horn will complete a field reconnaissance site visit to evaluate and document existing physical conditions and make observations. Data collected as a part of this field visit will be used to prepare a base map of the corridor in AutoCAD.

Deliverables:

- Traffic counts
- Base map

TASK 3 TRAFFIC AND SAFETY ANALYSIS AND EVALUATION

Traffic and Safety Analysis

Kimley-Horn will perform traffic and safety analysis services evaluating the possibility of a lane reduction along Alameda Ave. Kimley-Horn will coordinate with DOTI on a traffic modeling approach to evaluate present and future intersection conditions with Synchro software for modeling and SimTraffic software for evaluation using highway capital manual (HCM) methodology. The intersection analysis is anticipated to consist of capacity, delay, service levels, travel time runs, 95th percentile vehicle queue runs, and intersection Measures of Effectiveness (MOE) for the existing and up to two (2) proposed corridor alternatives. The model will be calibrated based on the travel time runs completed as a part of Task 2. A travel time model calibration memo will be provided comparing the model runs to the field conditions. The vehicle queuing analysis will utilize video footage and SimTraffic simulation for the future alternatives. Proposed traffic signal timing changes will be documented in a summary based on the findings of signal optimization. Kimley-Horn will also perform a safety analysis with the most recent five years of crash data to determine crash trends along the corridor to additionally facilitate appropriate intersection improvements and modifications. Multimodal features will be evaluated and incorporated if suitable with existing geometrics and characteristics of the corridor. Kimley-Horn will consider the feasibility of repurposing traffic lanes along the corridor and roadway cross sections. We will document the results in a written corridor study report. Kimley-Horn will address up to one (1) round of reasonable consolidated comments from DOTI on the corridor study report and proposed signal timing change summary.

Alternatives Evaluation

Kimley-Horn will utilize the data collected to develop, screen, evaluate, and summarize alternatives. Alternatives will consider potential cross-sections, facility alternatives, and cost estimates based on the existing and proposed traffic volumes, opportunities, and constraints along the corridor. Up to three (3) alternatives will be identified for screening. Alternative screening will be based on the project goals, data

collection, and input from DOTI. The screening criteria will allow us to "score" the different alternatives to identify the preferred choice. Alternative analysis will be documented in a trade-off matrix. Kimley-Horn will address up to one (1) round of reasonable consolidated comments from DOTI on the tradeoff matrix. The preferred alternative identified will used throughout the conceptual design phase for the project.

Deliverables:

- Traffic and safety analysis memorandum
- Travel time model calibration memorandum
- Operation and safety analysis results
- Multimodal Evaluation Matrix
- Proposed signal timing change summary

TASK 4 CONCEPTUAL DESIGN

Kimley-Horn will prepare up to one (1) conceptual design for the preferred alternative to a draft and final concept level. The conceptual design will be prepared using the base map completed in Task 2 and will consider supporting elements consisting of roadway, signing and striping, and traffic signal improvements. We anticipate the conceptual design to be presented on a roll plot and prepared at a draft and final concept level.

Our team will also develop a conceptual level estimate of probable cost. This cost estimate will be based on recent CCD bid tabulations and information available through the Colorado Department of Transportation (CDOT) Cost Data Book to develop general unit costs for the project.

Kimley-Horn will address up to one (1) round of reasonable consolidated comments from DOTI on the draft conceptual design roll plot and conceptual level cost estimate prior to the public meeting, see Task 5. Kimley-Horn will address up to one (1) round of reasonable consolidated comments following the public meeting and submit the final conceptual design roll plot and conceptual level cost estimate.

Deliverables:

- Draft and final conceptual design roll plot
- Comment response matrix
- Conceptual level estimate of probable costs

TASK 5 PUBLIC ENGAGEMENT

Kimley-Horn will develop a public engagement plan in partnership with CCD staff following the development of the draft concept. Kimley-Horn will prepare, lead, and document engagement activities for the project that are identified in the public engagement plan development. Activities are anticipated to consist of up to one (1) public meeting or non-traditional activity. Kimley-Horn will develop up to three (3) project boards and up to one (1) project flyer for public engagement activities.

Deliverables:

- Meeting summaries including notes, comments, and attendance records
- Project flyers, website updates, and presentation products, etc.

Additional Services

Any services not specifically provided for in the above scope will be billed as additional services and performed at our then current hourly rates. Additional services we can provide include, but are not limited to, the following:

- Final design; and
- Traffic signal design.

Information Provided by Client

We shall be entitled to rely on the completeness and accuracy of all information provided by the Client or the Client's consultants or representatives. The Client shall provide all information requested by Kimley-Horn during the project, including but not limited to the following:

- Crash data; and
- Existing signal timing work orders for all signalized intersections within the project limits.

Schedule

We will provide our services as expeditiously as practicable to meet the mutually agreed upon schedule after receipt of an executed agreement and notice to proceed. Our anticipated schedule is shown is attached for reference.

Fee

Kimley-Horn will provide the services described within Tasks 1-5 of the Scope of Services for a labor fee of **$58,070.00** as shown in the attached Fee Estimate. Sub-consultant labor fees will total **$7,836.60** and the total estimated expenses are **$250.00**. The total estimated expense fees are for printing materials for the one (1) in-person public meeting (as required). The total fee for all tasks is **$66,156.60**. The detailed breakdown of the fee proposal in its entirety is shown in Exhibit 'A'.

(The remainder of this page intentionally left blank)

Closure

We appreciate the opportunity to provide these services to you and are excited to work again with the City and County of Denver on this project. Please contact me if you have any questions.

Sincerely,

KIMLEY-HORN AND ASSOCIATES, INC.

By: Matt Ciarkowski, P.E.
Project Manager

By: Kory Andryscik, P.E.
Vice President

Attachments:

Exhibit 'A' – Fee Estimate

KHAMT
69

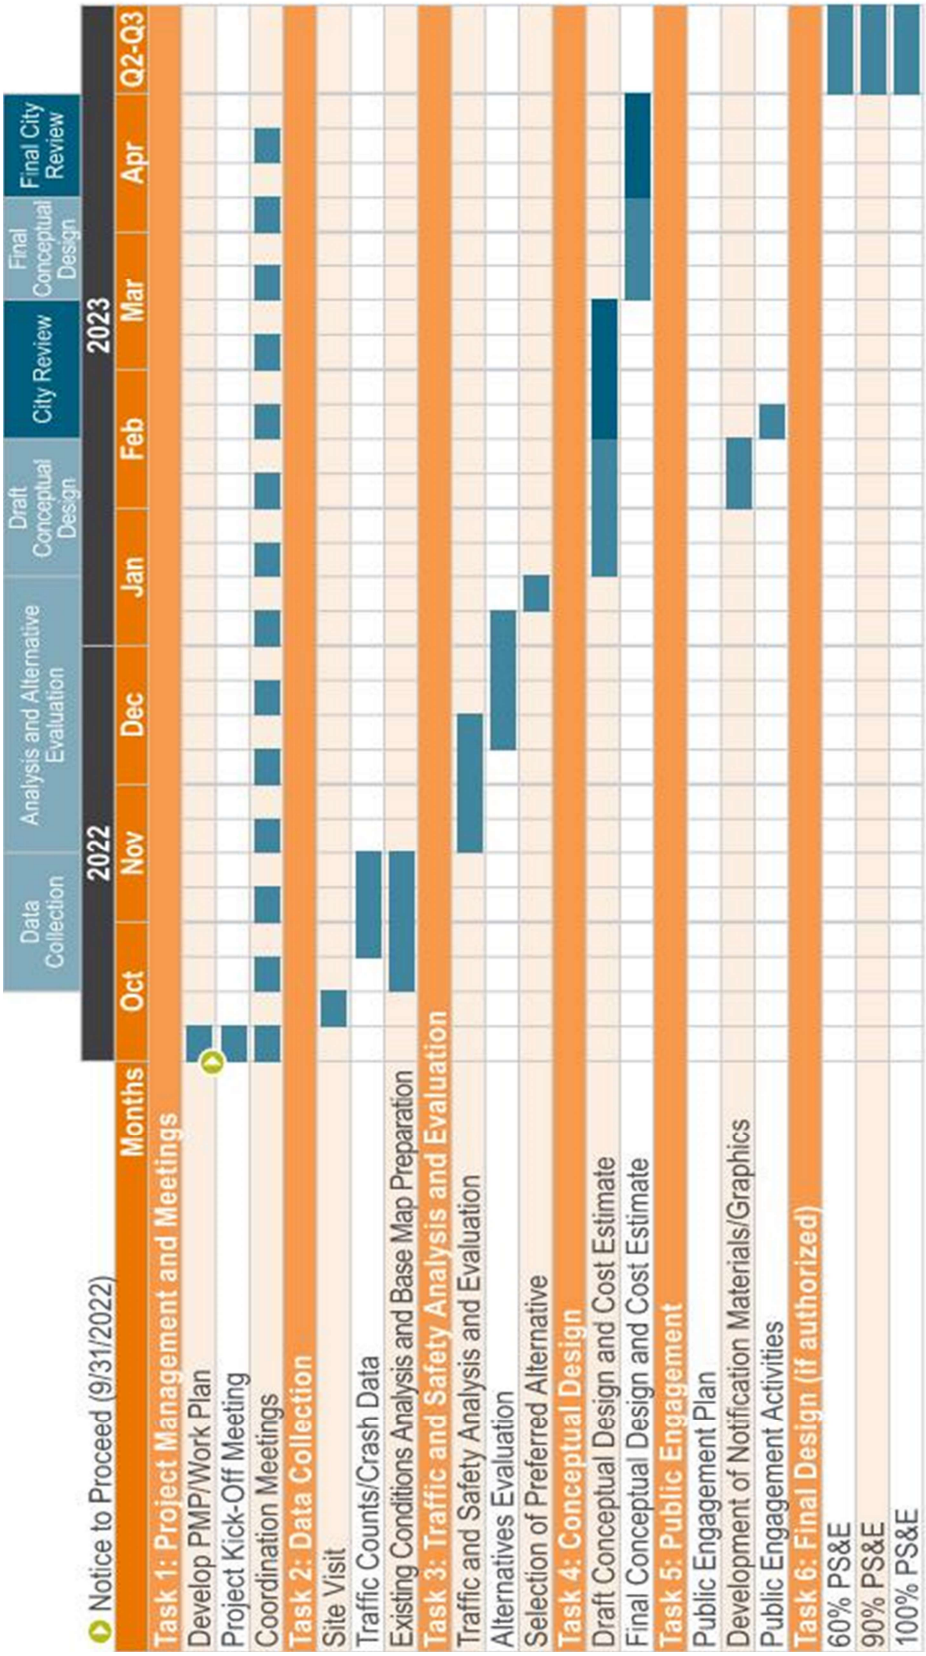
Data Collection
Analysis and Alternative Evaluation
Draft Conceptual Design
City Review
Final Conceptual Design
Final City Review
Notice to Proceed (9/31/2022)
Months
2022
2023
Oct
Nov
Dec
Jan
Feb
Mar
Apr
Q2-Q3
Task 1: Project Management and Meetings
Develop PMP/Work Plan
Project Kick-Off Meeting
Coordination Meetings
Task 2: Data Collection
Site Visit
Traffic Counts/Crash Data
Existing Conditions Analysis and Base Map Preparation
Task 3: Traffic and Safety Analysis and Evaluation
Traffic and Safety Analysis and Evaluation
Alternatives Evaluation
Selection of Preferred Alternative
Task 4: Conceptual Design
Draft Conceptual Design and Cost Estimate
Final Conceptual Design and Cost Estimate
Task 5: Public Engagement
Public Engagement Plan
Development of Notification Materials/Graphics
Public Engagement Activities
Task 6: Final Design (if authorized)
60% PS&E
90% PS&E
100% PS&E

City and County of Denver - Alameda Lane Reduction

Proposed Fee Estimate

Friday, August 12, 2022

Total Labor Fee	**$ 65,906.60**
Total Expenses	**$ 250.00**
Total Contract Amount (Not to Exceed)	**$ 66,156.60**

		Kimley-Horn							Ridgeview				
		Senior Professional II	Senior Professional I				Analyst II						TOTALS
Item	**Task**	PIC and QA/QC (Rowe)	Prject Manager (Ciarkowski)	Concept Development and Public Engagement (Pratt)	Traffic (Jeff Planck)	Final Design (Kahn)	Analysis/Production (Wylie, Gormley)	Senior Clerical (Myc)	Field Tech	Data Analysis Tech	QC Tech	Principal	
	Rates	$ 235.00	$ 200.00	$ 200.00	$ 200.00	$ 200.00	$ 125.00	$ 120.00	$ 56.00	$ 56.00	$ 69.00	$ 96.00	
	Hours	15.0	62.0	38.0	47.0	4.0	189.0	6.0	41.0	66.1	19.0	5.5	
	Estimated Total Labor by Individual	$ 3,525.00	$ 12,400.00	$ 7,600.00	$ 9,400.00	$ 800.00	$ 23,625.00	$ 720.00	$ 2,296.00	$ 3,701.60	$ 1,311.00	$ 528.00	
	Estimated Total Labor Fee by Firm							$58,070.00				$7,836.60	
1	**Project Management and Meetings**												
1.A	Project Management Plan (PMP)/Work Plan												-
1.A.1	Detailed Project Schedule		1.0										1.0
1.A.2	Detailed Project Budgets		1.0										1.0
1.A.3	Quality Plan	1.0	1.0										2.0
1.A.4	Communication Plan		1.0	1.0									2.0
1.B	Project Coordination/Meetings												-
1.B.1	Kickoff Meeting	1.0	1.0	1.0	1.0								4.0
1.B.2	Bi-weekly Coordination Meetings (up to twelve (12) 1-hour meetings, agendas, and minutes)		18.0	4.0	4.0								26.0
1.C	Monthly Invoicing, Budget Monitoring and Reporting		6.0					6.0					12.0
1.D	Project Oversight/Management		6.0										6.0
		2.0	35.0	6.0	5.0	-	-	6.0	-	-	-	-	54.0
		$ 470.00	$ 7,000.00	$ 1,200.00	$ 1,000.00	$ -	$ -	$ 720.00	$ -	$ -	$ -	$ -	$ 10,390.00
2	**Data Collection**												
2.A	Traffic/Crash Data Collection												-
2.A.1	TMC and ADT Traffic Counts								41.0	66.1	19.0	5.5	131.6
2.A.2	Travel Time Runs						4.0						4.0
2.A.3	Crash Data				2.0		4.0						6.0
2.B	Site Visit												-
2.B.1	Site Visit, Preparation, and Processing		3.0				3.0						6.0
2.C	Base Map												-
2.C.1	Preparation and Processing						5.0						5.0
		-	3.0	-	2.0	-	16.0	-	41.0	66.1	19.0	5.5	152.6
		$ -	$ 600.00	$ -	$ 400.00	$ -	$ 2,000.00	$ -	$ 2,296.00	$ 3,701.60	$ 1,311.00	$ 528.00	$ 10,836.60
3	**Traffic and Safety Analysis & Evaluation**												
3.A	Traffic and Safety Analysis & Evaluation												-
3.A.1	Operation and Safety Analysis Results	3.0	2.0	2.0	28.0		64.0						99.0
3.A.2	Summary of Signal Timing Changes	3.0	2.0	2.0	8.0		16.0						31.0
3.A.3	Model Calibration Memorandum	1.0			2.0		10.0						13.0
3.B	Alternatives Analysis												-
3.B.1	Alternatives Analysis and Cross Section Development	1.0	2.0	6.0	2.0	1.0	10.0						22.0
3.B.2	Screening, Matrix of Multimodal Trade-offs and Recommended Alternative	1.0	2.0	6.0		1.0	10.0						20.0
		9.0	8.0	16.0	40.0	2.0	110.0	-	-	-	-	-	185.0
		$ 2,115.00	$ 1,600.00	$ 3,200.00	$ 8,000.00	$ 400.00	$ 13,750.00	$ -	$ -	$ -	$ -	$ -	$ 29,065.00
4	**Conceptual Design**												
4.A	Draft Conceptual Design												-
4.A.1	Conceptual Design Roll Plot	1.0	4.0	5.0		1.0	25.0						36.0
4.A.2	Cost Estimate		1.0				4.0						5.0
4.A.3	Address up to one (1) round of CCD comments on Draft Conceptual Design (pre-Public Meeting)	1.0	2.0	2.0			6.0						11.0
4.B	Final Conceptual Design	1.0	2.0	2.0		1.0	8.0						14.0
4.B.1	Conceptual Design Roll Plot		1.0				4.0						5.0
4.B.2	Cost Estimate		1.0				2.0						3.0
4.B.3	Address up to one (1) round of CCD comments on Draft Conceptual Design (post-Public Meeting)	1.0	2.0	2.0			8.0						13.0
		4.0	13.0	11.0	-	2.0	57.0	-	-	-	-	-	87.0
		$ 940.00	$ 2,600.00	$ 2,200.00	$ -	$ 400.00	$ 7,125.00	$ -	$ -	$ -	$ -	$ -	$ 13,265.00
5	**Public Engagement Support**												
5.A	Public Notification Materials			2.0			6.0						8.0
5.B	Attend Public Meeting (up to one (1) Public Meeting)		3.0	3.0									6.0
		-	3.0	5.0	-	-	6.0	-	-	-	-	-	14.0
		$ -	$ 600.00	$ 1,000.00	$ -	$ -	$ 750.00	$ -	$ -	$ -	$ -	$ -	$ 2,350.00
EXP	**Reimbursable Expenses**												
	Reimbursable Expenses - Printing Materials for one (1) In-Person Public Meeting (as required)							$250.0				$0.0	$ 250.00
	Total Labor Fee												**$ 65,906.60**
	Total Expense Fee												**$ 250.00**
	Total Proposed Base Fee												**$ 66,156.60**

Kimley-Horn and Associates, Inc.
Printed: 8/12/2022

Purchase Order	Line Number	Memo	Spend Category as Worktag	Supplier as Worktag	Supplier ID	Distrib Obligation Amount	Distrib Obligation Amount Liquidated	Distrib Obligation Amount Remaining	Distrib Worktags
PO-00120141	1	DOTI-202264596 OC202056606 (SC-00005573) KIMLEY-HORN AND ASSOCIATES INC TO #2 To evaluate and identify the lane reduction limits, verify traffic operations, safety of proposed changes and conceptual design of lane reduction on West Alameda between Franklin and Lincoln Streets. $66,156.60 31025/5011100/81100000/EP000374/PC022/PRJ-10004551 Requested by: Abi Subramanian 720-913-1736	81100000 - Professional engineering services	KIMLEY-HORN AND ASSOCIATES INC	DENVR0000006764	66,156.60	0.00	66,156.60	Capital Program: PC022 - Safety and Neighborhoods Cost Center: 5011100 Office of the Executive Director - Administration External Program: EP000374 (Category 4) Multimodal Design Fund: 31025 Public Works Annual Programs Prevailing Wage Investigator: Not Prevailing Wages Project: PRJ-10004551 West Alameda Lane Reduction Region: DCW City Wide